

Safety Luminaire and Escape Sign Luminaire Style 22021 CG-S



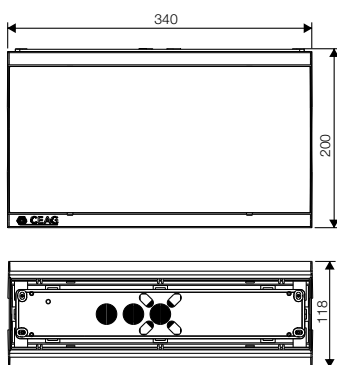
- Double-sided escape sign luminaire of high quality, UV-resistant, halogen-free plastic
- Modular constructed luminaire series permits combination with various fixing modules
- Includes two transparent covers with simple snap mounting and pictogram foil set
- Simple mounting via quick mounting set (can be pre-assembled) with integrated terminal block for through-wiring
- Optionally available IP54 set (for electronic and light source) for increased sealing requirements for indoor rooms or for protected outdoor areas
- Shortened inspection effort due to CEWA GUARD technology
- Automatic function monitoring of up to 20 luminaires per circuit
- Reduced installation expenditure with STAR technology
- Freely programmable mixed operation of the switching modes per luminaire in one circuit





22021 CG-S
with pictogram foil PR

Viewing distance	32 m
Luminous flux Φ_E/Φ_N at the end of rated operating time	75 %
Housing material	Polycarbonate (850 °C glow wire resistant)
Weight incl. cover	1.10 kg
Housing colour	Grey
Type of mounting	Ceiling mounting
Connection terminals	Loop terminals 3 x 2.5 mm ²
Connection voltage	220 - 240 V, 50/60 Hz 176 - 275 V DC
Current consumption - battery operation (220 V)	30 mA
Power consumption mains operation	16 VA
Permissible temperature range	-10 °C to +40 °C
Light source	8 W/T16, 450 lm

Dimensions in mm



Ordering details

Type	Scope of supply	Order No.
22021 CG-S set acc. to ISO 7010	Luminaire housing with quick-mounting set and cover, with CEWA GUARD monitoring and 20-digit address switch incl. 4 pictogram foils PL, PR, PU and BL 	40071354560
22021 CG-S als IP54-Set gem. ISO 7010	Luminaire housing with quick-mounting set, IP54 set and cover, with CEWA GUARD monitoring and 20-digit address switch incl. 3 pictogram foils PL, PR and PU 	40071354561

Accessories

Type

Optionally available silkscreened pictograms: see page 1/47 and 1/53

For further accessories see page 1/51